
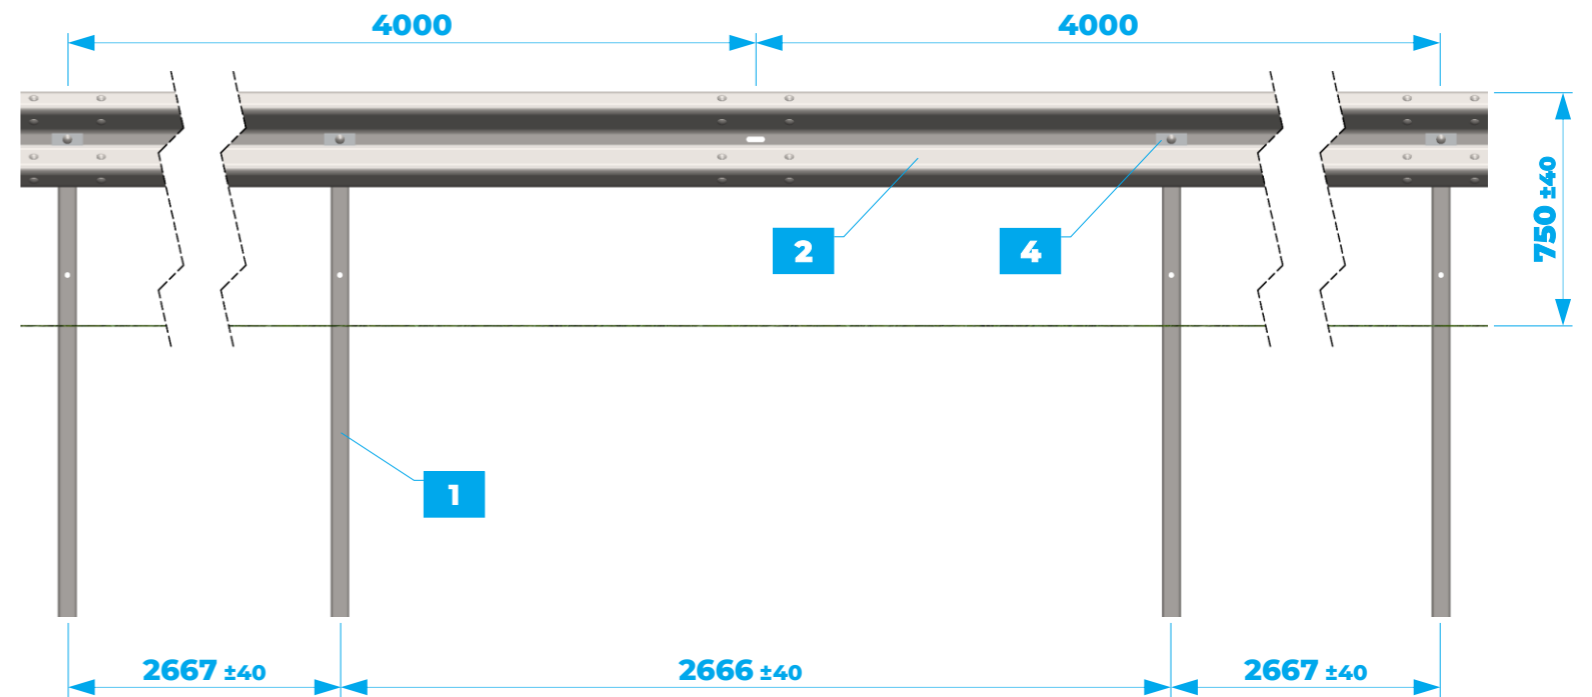


TR H1-W3

CE 584/2131/CPR/2017

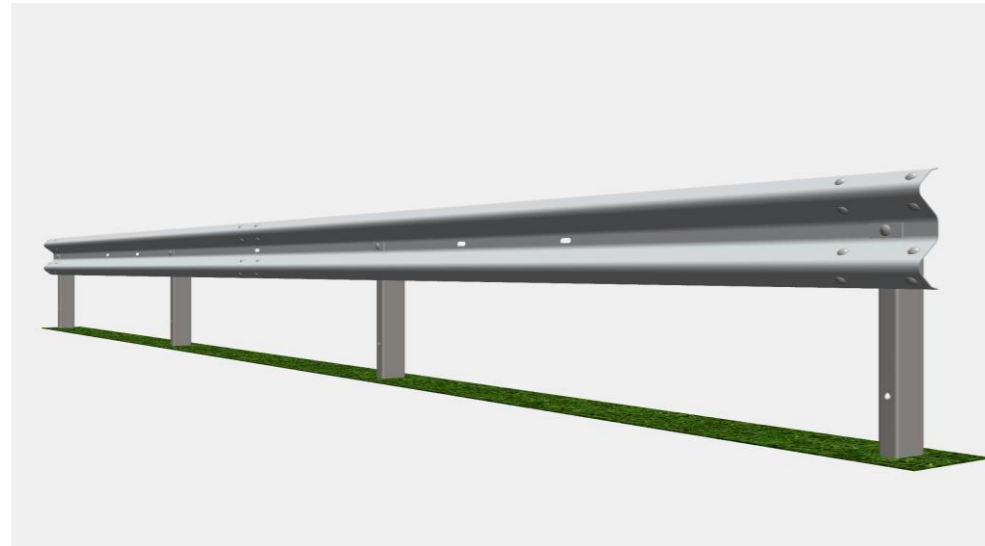

Characteristics

Height above ground	750 mm
Depth of penetration	935 mm
Overall width	200 mm
Post spacing	2.667 mm
Modularity	4.000 mm

Performance EN 1317

Test TB11, car, 900kg, 100km/h, 20°	Aisico #1469
Test TB42, rigid HGV, 10.000kg, 70km/h, 15°	Aisico #1472
Installation length	48 m
Containment level	H1
Severity impact	A
Normalised working width	W3
Normalised dynamic deflection	0,9 m
Normalised vehicle intrusion	VI4



#	Component	Galvanized	Corten
1	Post, C120, 1.600 mm, 4,00 mm	S355 JR	S355 J0W
2	Beam, 2W profile, 4.300 mm, 2,50 mm	S355 JR	S355 J0W
3	Post reinforcement, U105, 250 mm, 4,00 mm	S355 JR	S355 J0W
4	Connection plate, M16, 100 mm, 5,00 mm	S235 JR	S355 J0W
5	Round head bolt M16x27, nut, washer	8.8	Tropicaliz.
6	Round head bolt M16x45, nut, washer	8.8	Tropicaliz.

