
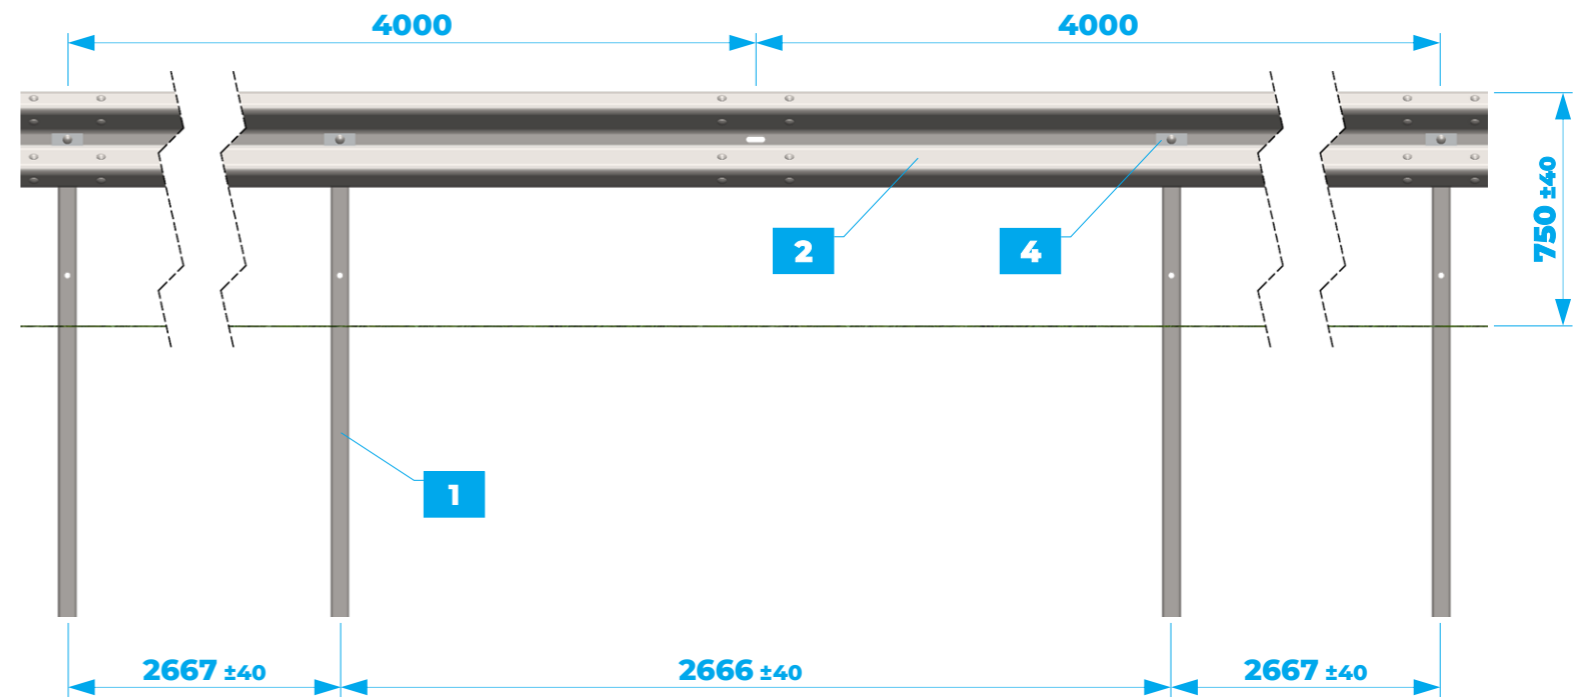


# TR N2-W2

CE 583/2131/CPR/2017

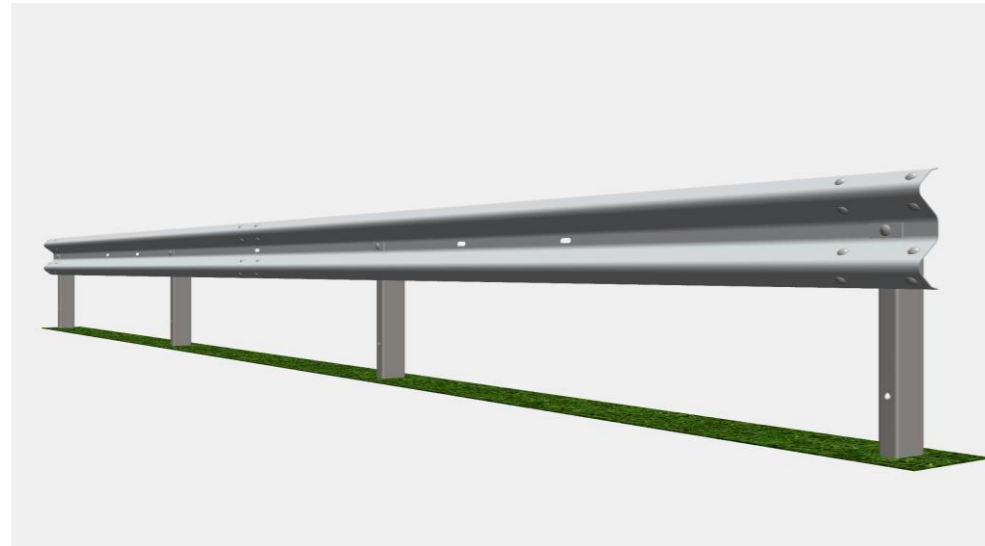

### Characteristics

Height above ground	750 mm
Depth of penetration	935 mm
Overall width	200 mm
Post spacing	2.667 mm
Modularity	4.000 mm

### Performance EN 1317

Test TB11, car, 900kg, 100km/h, 20°	Aisico #1469
Test TB32, car, 1.500kg, 110km/h, 20°	Aisico #1468
Installation length	48 m
Containment level	N2
Severity impact	A
Normalised working width	W2
Normalised dynamic deflection	0,7 m
Normalised vehicle intrusion	-



#	Component	Galvanized	Corten
1	Post, C120, 1.600 mm, 4,00 mm	S355 JR	S355 J0W
2	Beam, 2W profile, 4.300 mm, 2,50 mm	S355 JR	S355 J0W
3	Post reinforcement, U105, 250 mm, 4,00 mm	S355 JR	S355 J0W
4	Connection plate, M16, 100 mm, 5,00 mm	S235 JR	S355 J0W
5	Round head bolt M16x27, nut, washer	8.8	Tropicaliz.
6	Round head bolt M16x45, nut, washer	8.8	Tropicaliz.

